




File: E209153

Mechanical Specifications (mm)

D:	15.0	± .5
T:	5.5	± .50
Lead Diameter	0.8	± Nom
S:	7.8	± Nom
L:	38.0	± Nom
Coating Lead Run Down (straight Leads)	5.0	± Max
B:	7.50	± Nom
C:	3.60	± .4

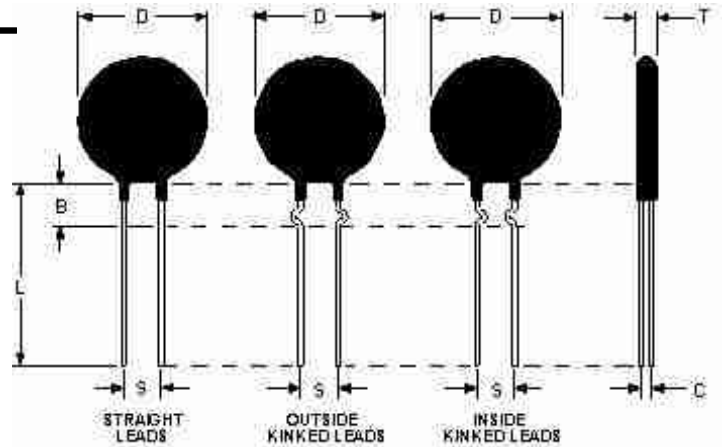

Electrical Specifications

Resistance:	80.0 Ω	± 25 %
Max Steady State Current upto 65°C:	2.00	A
Max Rec. Energy Rating:	45	J
Resistance @ 100% Max Current:	1.00	Ω
Resistance @ 50% Max Current:	1.40	Ω
Body Temperature at 100% Max Current:	174.00	°c
Dissipation Constant:	54.0	mw/°c
Thermal Time Constant:	54	Sec.
Material Type (for Beta and Curve):	M	

SL15 80002	
Date: 02/14/2012	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A