


Mechanical Specifications

D	13.0 mm Max
T	5.0 mm ± 0.5 mm
Lead Diameter	0.6 mm ± 0.1 mm
S	5.0 mm Nom
L	32.0 mm Nom
B	5.0 mm ± 0.5mm

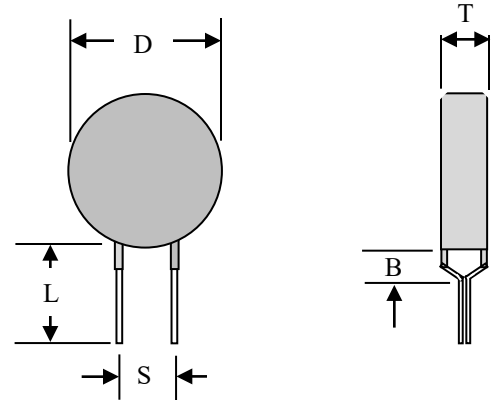

Electrical Specifications

R@25°C	50Ω ±20%
Minimum Switching Current @ 25°C	.175 Amp
Max Continuous Non-trip Current @ 25°C	0.087 Amp
Maximum Voltage Rating	300 Vrms
Maximum allowable current at max voltage	2.30A
Heat Capacity	0.8 Joules/°C
Thermal Time Constant	40 sec.
Switch Temperature	125°C ± 5°C

Ametherm, Inc
961 Fairview Drive
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 775 884-0670
www.Ametherm.com