


Mechanical Specifications

D	22.0 mm Max
T	6.0 mm Max
Lead Diameter	1.0 mm Nom
S	7.8 mm Nom
L	38.0 mm Nom
B	9.0 mm \pm 1.0mm
C	3.5mm \pm 0.2mm
Straight Leads	Standard

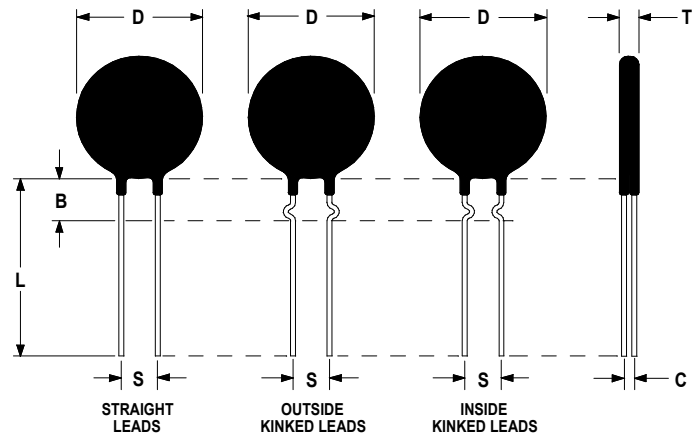

Electrical Specifications

Resistance @ 25°C	10.0 Ω \pm 25%
Transition Temp	120° C
Max voltage Rating	480 Vrms
Max Energy Rating	250J
Switch Current @ 25°C	0.800A
Continuous Current @ 25°C	0.400A
Heat Capacity	2.0 Joules/°C
Dissipation Constant	22.50 mW/°C
Thermal Time Constant	65.0 seconds
Max Body Temp. @ Max voltage	174°C

Ametherm, Inc
961 Fairview Dr.
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 775 884-0670
www.Ametherm.com

Reliability Delivered On Time