


Mechanical Specifications

| | |
|----------------|--------------------|
| D | 22.0 mm Max |
| T | 6.0 mm Max |
| Lead Diameter | 1.0 mm Nom |
| S | 7.8 mm Nom |
| L | 38.0 mm Nom |
| B | 9.0 mm \pm 1.0mm |
| C | 3.5mm \pm 0.2mm |
| Straight Leads | Standard |

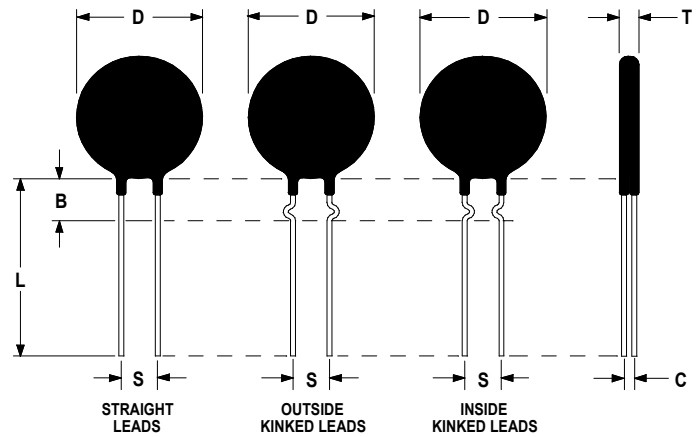

Electrical Specifications

| | |
|------------------------------|-------------------------|
| Resistance @ 25°C | 20.0 Ω \pm 25% |
| Transition Temp | 120° C |
| Max voltage Rating | 680 Vrms |
| Max Energy Rating | 500J |
| Switch Current @ 25°C | 0.600A |
| Continuous Current @ 25°C | 0.300A |
| Heat Capacity | 2.25 Joules/°C |
| Dissipation Constant | 22.50 mW/°C |
| Thermal Time Constant | 65.0 seconds |
| Max Body Temp. @ Max voltage | 172°C |

Ametherm, Inc
961 Fairview Dr.
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 775 884-0670
www.Ametherm.com

Reliability Delivered On Time