


**Mechanical Specifications**

D	22.0 Max
T	5.0 Max
Lead Diameter	0.8 mm Nom
S	7.8 mm Nom
L	38.0 mm Min
Straight Lead	Standard
Coating Material	Silicone Resin

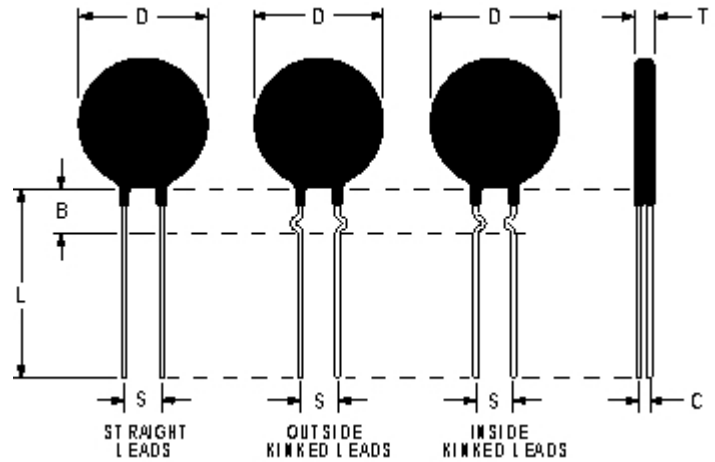

**Electrical Specifications**

Resistance @ 25° C	25.0 Ω ± 30%
Transition Temperature	100° C Nom
Maximum Voltage Rating	700V DC
Maximum Inrush Current Allowed for 100 cycles only	15.0 Amps Peak
Switch Current @ 25° C	400 mA
Switch Current @ 0° C	450 mA
Continuous Current @ 25° C	300 mA
Continuous Current @ 55° C	250 mA
Residual Current @ Max Voltage	14.0 mA
Heat Capacity	4.0 Joules / °C
Dissipation Constant	23.5 mW/°C
Thermal Time Constant	65 sec
Max Body Temperature @ Max Voltage	174° C
Dielectric Voltage between the leads and the coated body	1200 VAC for 1.0 minute

Rev Date: April 28, 2005

**Ametherm Inc, 3111 North Deer Run Road Suite #4 Carson City, NV 89701**

Telephone: (800) 808 2434 · (775) 884-2434 · Fax (775) 884-0670

www.Ametherm.com

*Reliability Delivered On Time*