


Mechanical Specifications (mm)

D:	20.0	± 1
T:	7.0	± .7
Lead Diameter	1.0	± .1
S:	7.8	± 2
L:	38.0	± 9
Coating Lead Run Down (straight Leads)	5.0	± 1
B:	7.50	± 2.50
C:	3.82	± 1

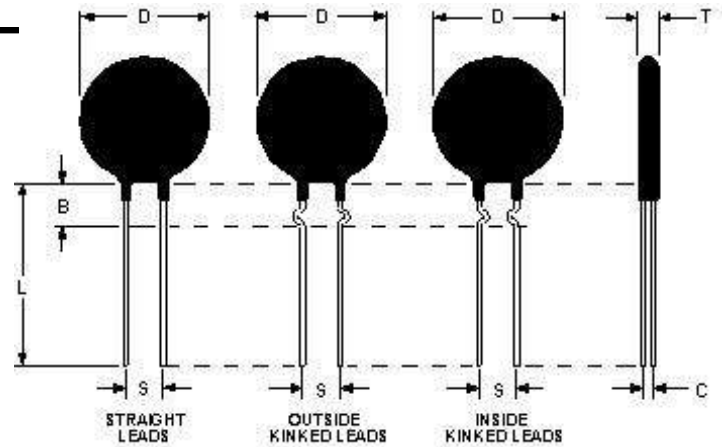

Electrical Specifications

Resistance:	5.0	Ω	± 25 %
Max Steady State Current upto 65°C:	15.00		A
Max Rec. Energy Rating:	200		J
Resistance @ 100% Max Current:	0.00		Ω
Resistance @ 50% Max Current:	0.13		Ω
Body Temperature at 100% Max Current:	194.00		°C
Dissipation Constant:	45.4		mw/°C
Thermal Time Constant:	112		Sec.
Material Type (for Beta and Curve):	C		

MS22 5R015	
Date: 08/21/2012	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A