




File: E209153



ISO9001:2008 Certified

Mechanical Specifications (mm)

	D:	23.0	± max
	T:	9.0	± max
	Lead Diameter	1.0	± nom
	S:	7.8	± nom
	L:	38.0	± nom
	Coating Lead Run Down (straight Leads)	4.0	± max
	B:	9.20	± nom
	C:	6.90	± nom

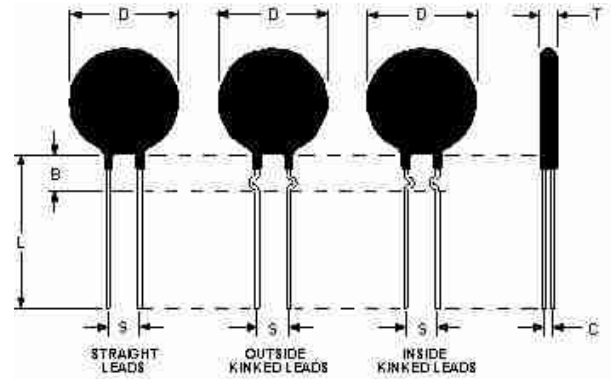

Electrical Specifications

	Resistance:	75.0 Ω	± 25 %
	Max Steady State Current upto 65°C:	4.00	A
	Max Rec. Energy Rating:	240	J
	Actual Failure Instantaneous Energy:	430	J
	Maximum Capacitance @ 120 VAC:	16,400	µf
	Maximum Capacitance @ 240 VAC:	4,167	µf
	Maximum Capacitance @ 440 VAC:	963	µf
	Maximum Capacitance @ 680 VAC:	480	µf
	Resistance @ 100% Max Current:	0.00	Ω
	Resistance @ 50% Max Current:	0.90	Ω
	Body Temperature at 100% Max Current:	169.00	°c
	Dissipation Constant:	51.8	mw/°c
	Thermal Time Constant:	122	Sec.
	Material Type (for Beta and Curve):	M	

MS22 75004	
Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A