



REV	DATE	ECO#
A	03/31/95	1342

DRAWING NOT TO SCALE
ALL DIMENSIONS IN INCHES

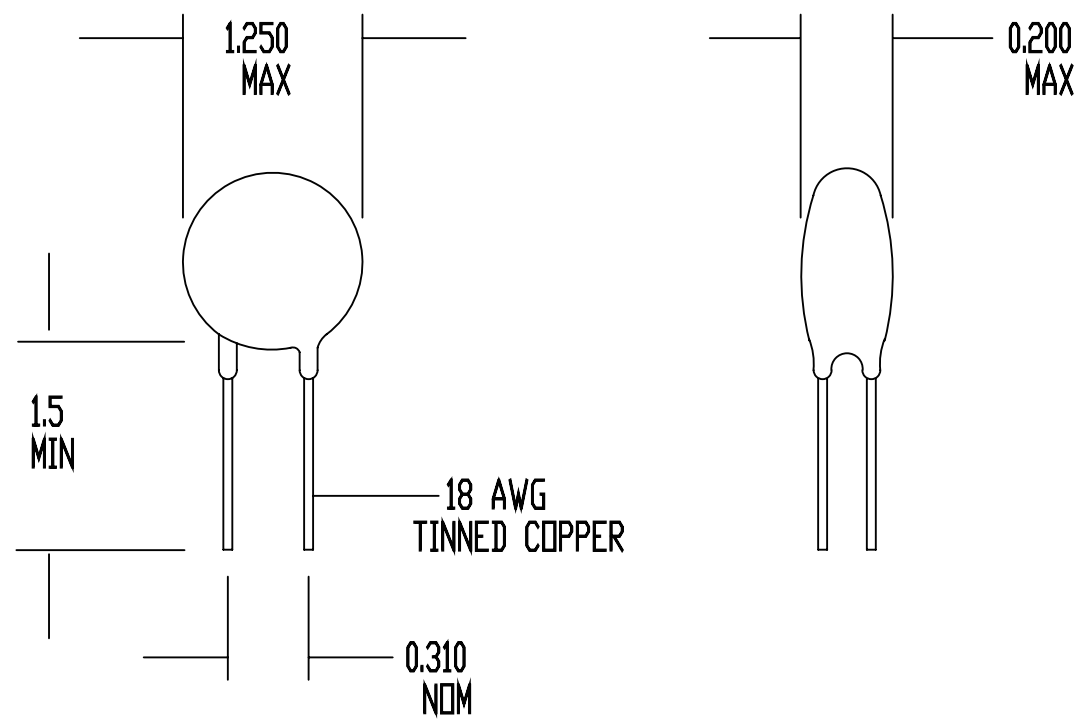

SPECIFICATIONS:

RESISTANCE AT 25 DEG C = 0.5 OHMS +/- 20%
 MAX CONTINUOUS CURRENT (I_{max}) = 30 AMPS
 RESISTANCE AT I_{max} = 0.010 OHMS NOMINAL
 MAX VOLTAGE RATING = 120 VAC (RMS)
 MAX SURGE RATING = 31 JOULES
 ENCAPSULATION = SILICONE RESIN
 MARKING = OPTIONAL
 LEADS = RODAN P/N STL-209-50

DRAWN BY D. NGUYEN		 AMETHERM <i>Circuit Protection Thermistors</i>
DATE 12/06/88	ORIG. F. TISEO	
REV A	APP	SURGE-GARD INRUSH CURRENT LIMITER
SHEET 1 OF 1		SG260