
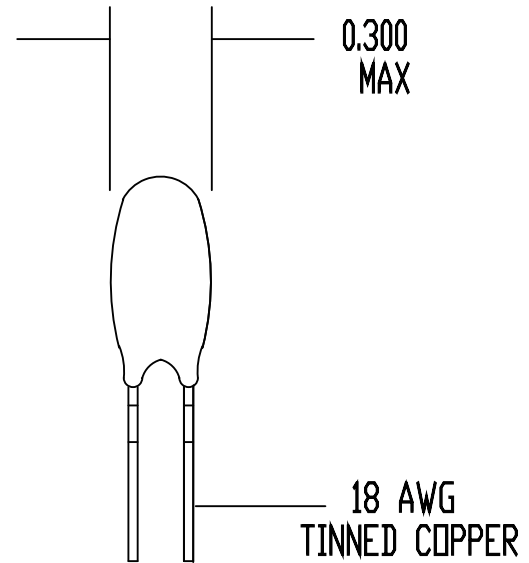



| | | |
|-----|----------|------|
| REV | DATE | ECD# |
| A | 01/27/92 | 1194 |
| | | |

DRAWING NOT TO SCALE
ALL DIMENSION IN INCHES

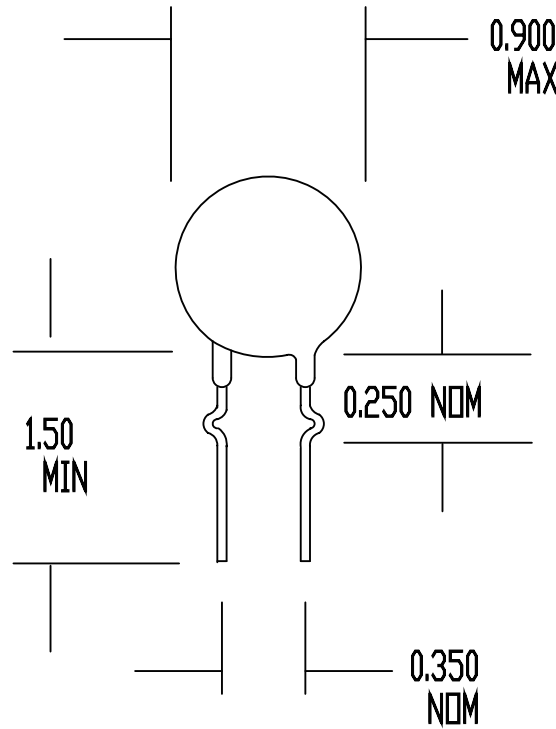

SPECIFICATIONS:

RESISTANCE AT 25 DEG C = 1 OHM +/- 15%
 MAX CONTINUOUS CURRENT (I_{max}) = 20 AMPS
 RESISTANCE AT I_{max} = 0.015 OHMS NOMINAL
 MAX VOLTAGE RATING = 120 VAC (RMS)
 MAX SURGE RATING = 48 JOULES
 ENCAPSULATION = SILICONE RESIN
 MARKING = OPTIONAL
 LEADS = RODAN P/N STL 209-45

| | | |
|--------------------|------|--------------------------------------------------------------------------------------------------------------------------------|
| DRAWN BY D. NGUYEN | |  Circuit Protection Thermistors |
| DATE 09/25/90 | | |
| REV A | APP. | SURGE-GARD INRUSH CURRENT LIMITER |
| SHEET 1 OF 1 | | SG301 |