



REV	DATE	ECO#
A	09/06/90	1140
B	03/31/95	1342

DRAWING NOT TO SCALE  
ALL DIMENSIONS IN INCHES

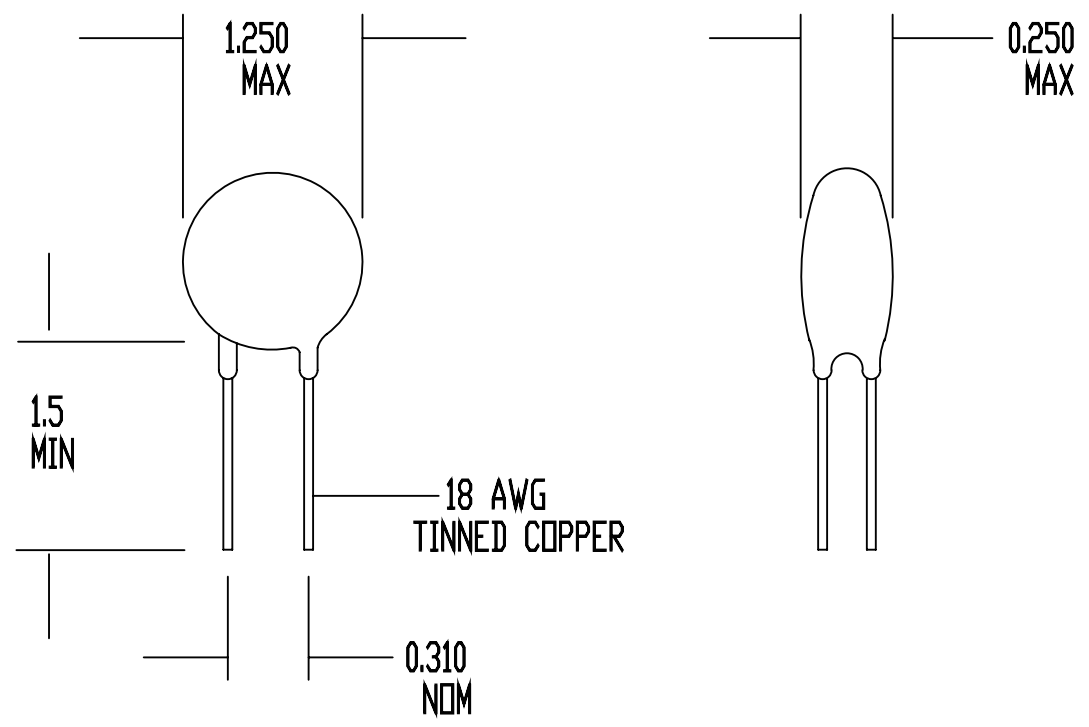

SPECIFICATIONS:  
 RESISTANCE AT 25 DEG C = 1 OHM +/- 25%  
 MAX CONTINUOUS CURRENT (I<sub>max</sub>) = 30 AMPS  
 RESISTANCE AT I<sub>max</sub> = 0.015 OHMS NOMINAL  
 MAX VOLTAGE RATING = 265 VAC (RMS)  
 MAX SURGE RATING = 157 JOULES  
 ENCAPSULATION = SILICONE RESIN  
 MARKING = OPTIONAL  
 LEADS = RODAN P/N STL-209-50

DRAWN BY D. NGUYEN		 <b>Circuit Protection Thermistors</b>
DATE 08/24/88	ORIG. F. TISED	
REV B	APP	<b>SURGE-GARD INRUSH CURRENT LIMITER</b>
SHEET 1 OF 1		SG405