


REV	DATE	ECD#
A	12/14/92	1232
B	01/20/06	28878

DRAWING NOT TO SCALE  
ALL DIMENSIONS IN INCHES

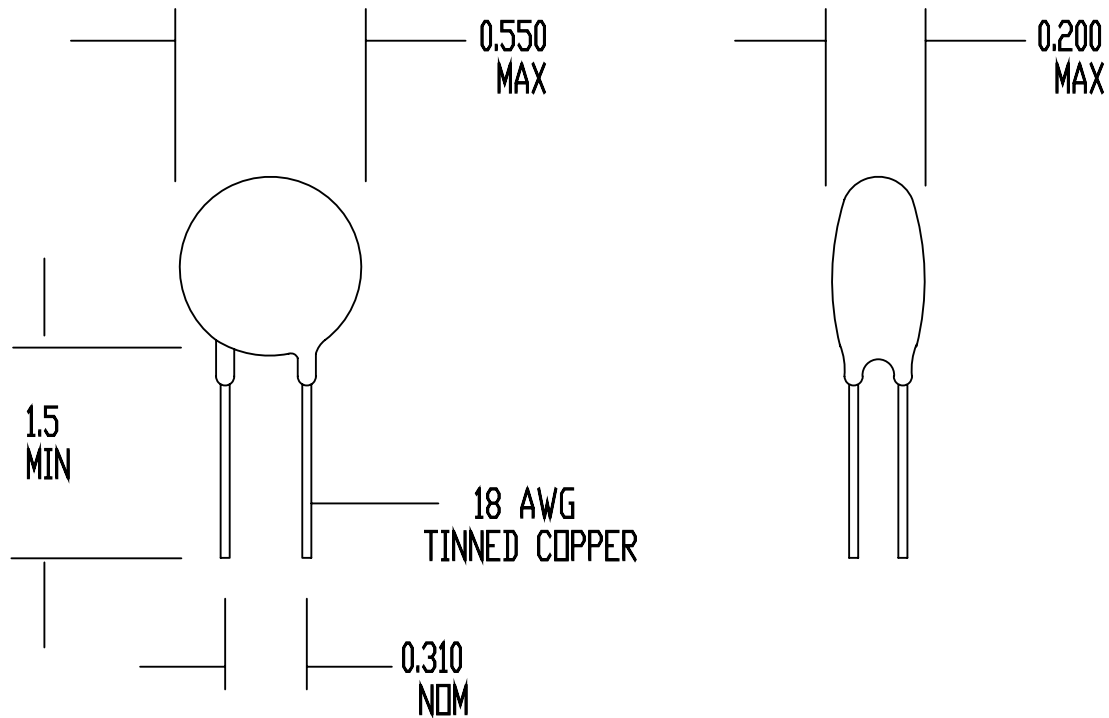

**SPECIFICATIONS:**  
 RESISTANCE AT 25 DEG C = 1.3 OHMS +/- 25%  
 MAXIMUM CONTINUOUS CURRENT (I<sub>max</sub>) = 8 AMPS  
 RESISTANCE AT I<sub>max</sub> = 0.05 OHMS NOMINAL  
 MAXIMUM VOLTAGE RATING = 265 VAC (RMS)  
 MAXIMUM SURGE RATING = 40 JOULES  
 ENCAPSULATION = SILICONE RESIN  
 MARKING = OPTIONAL

CROSS TO KEYSTONE P/N CL-20

DRAWN BY D. NGUYEN		<b>AMETHERM</b> <i>Circuit Protection Thermistors</i>
DATE 08/28/90	ORIG. F. TISED	
REV B	APP	SURGE-GARD INRUSH CURRENT LIMITER
SHEET 1 OF 1		SG416