




File: E209153

Mechanical Specifications (mm)

D:	16.0	± max
T:	6.0	± max
Lead Diameter	0.8	± nom
S:	7.8	± nom
L:	38.0	± nom
Coating Lead Run Down (straight Leads)	5.0	± max
B:	4.00	± nom
C:	3.80	± nom

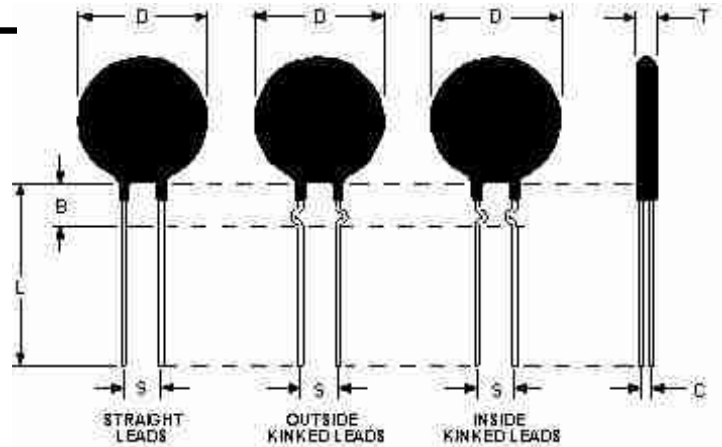


Electrical Specifications

Resistance:	7.0	Ω	± 20 %
Max Steady State Current upto 65°C:	5.00	A	
Max Rec. Energy Rating:	60	J	
Maximum Capacitance @ 120 VAC:	4,167	µf	
Maximum Capacitance @ 240 VAC:	1,041	µf	
Resistance @ 100% Max Current:	0.00	Ω	
Resistance @ 50% Max Current:	0.17	Ω	
Body Temperature at 100% Max Current:	172.00	°c	
Dissipation Constant:	15.9	mw/°c	
Thermal Time Constant:	54	Sec.	
Material Type (for Beta and Curve):	G		

SL15 7R005	
Date: 04/08/2011	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A

Mechanical Specifications (mm)

	D:	15.0	± .5
	T:	4.5	± .2
	Lead Diameter	0.8	± .1
	S:	7.8	± 2.0
	L:	38.0	± 9
	Coating Lead Run Down (straight Leads)	5.0	± 1
	B:	6.35	± .60
	C:	2.82	± .5

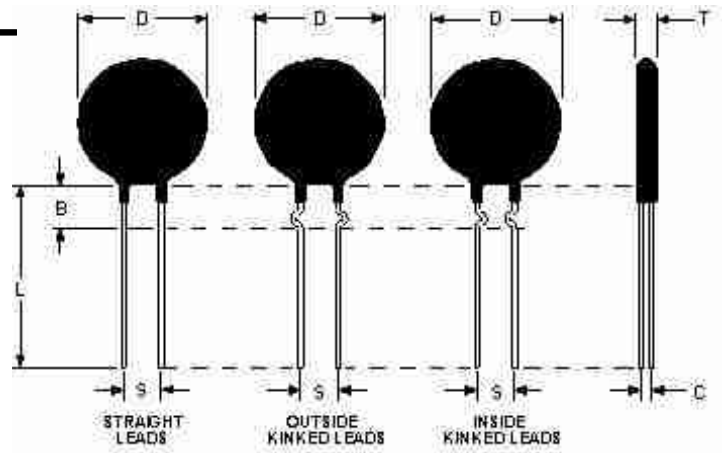

Electrical Specifications

	Resistance:	7.0	Ω	± 20 %
	Max Steady State Current upto 65°C:	5.00		A
	Max Rec. Energy Rating:	60		J
	Resistance @ 100% Max Current:	0.00		Ω
	Resistance @ 50% Max Current:	0.17		Ω
	Body Temperature at 100% Max Current:	172.00		°c
	Dissipation Constant:	15.9		mw/°c
	Thermal Time Constant:	54		Sec.
	Material Type (for Beta and Curve):	G		

SL15 7R005

SL15 7R005	
Date: 04/08/2011	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A