




File: E209153



ISO9001:2008 Certified

Mechanical Specifications (mm)

| | | |
|---|------|-------|
| D: | 22.0 | ± max |
| T: | 7.0 | ± max |
| Lead Diameter | 1.0 | ± nom |
| S: | 7.8 | ± nom |
| L: | 38.0 | ± nom |
| Coating Lead Run Down (straight Leads) | 4.0 | ± nom |
| B: | 9.00 | ± nom |
| C: | 3.10 | ± nom |

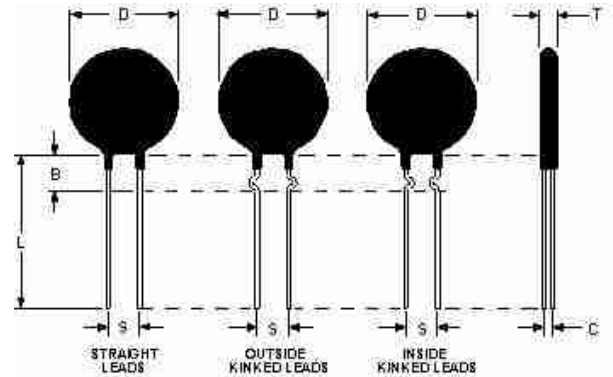

Electrical Specifications

| | | |
|---------------------------------------|--------|--------|
| Resistance: | 16.0 Ω | ± 20 % |
| Max Steady State Current upto 65°C: | 5.00 | A |
| Max Rec. Energy Rating: | 100 | J |
| Actual Failure Instantaneous Energy: | 250 | J |
| Maximum Capacitance @ 120 VAC: | 6,500 | µf |
| Maximum Capacitance @ 240 VAC: | 1,500 | µf |
| Resistance @ 100% Max Current: | 0.00 | Ω |
| Resistance @ 50% Max Current: | 0.65 | Ω |
| Body Temperature at 100% Max Current: | 157.00 | °c |
| Dissipation Constant: | 38.0 | mw/°c |
| Thermal Time Constant: | 94 | Sec. |
| Material Type (for Beta and Curve): | I | |

| | |
|---|--------------------------|
| SL22 16005 | |
| Date: 05/04/2012 | Drawn by: Erin Landis |
| Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com | Approved By: Mehdi Samii |
| | Revision: A |